

7/21

CITY OF BAINBRIDGE ISLAND
DEPARTMENT OF PLANNING AND COMMUNITY DEVELOPMENT
280 MADISON AVENUE NORTH · BAINBRIDGE ISLAND, WA · 98110-1812
PHONE: (206) 842-2552 · FAX: (206) 780-0955 Web Site: www.ci.bainbridge-isl.wa.us

LETTER OF TRANSMITTAL

Fire Review

Project Name: EAGLE HBR CONGRETION CHURCH
Date Material Received: 7/19/2006
Project Number: PRJ-0013641
Case Number: BLD13641FIS
Parcel Number: 27250241152008
Site address: 105 Winslow Way W
Case Description: EAGLE HARBOR CONGRATONAL CHURCH FIRE ~~ALARM~~ SPRINKLER

Owner, Applicant & City Planner:

Owner
EAGLE HARBOR CONGRATONAL CHURCH
105 Winslow Way W
Bainbridge Island, WA 98110

Documents Distributed:

Comments Due By:

Date Sent:


07/19/2006

Comments:

If you need further space for your comments, please attach an additional page. If you have no comments, please write "NO COMMENT" in the space below and return to Planning.

Comments ATTACHED TO PLANS.

Signed:




FIRE MARSHAL

Date:

8/2/06

Printed:

JARED MURAWSKI

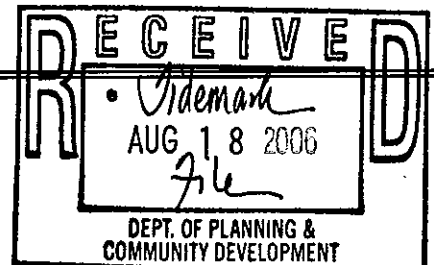

Plans Specific Comments:

1. Field verification of coverage may be required.
-

Standard Comments:

2. All fire sprinkler systems shall be installed according to the 2003 International Fire Code and the applicable NFPA Standard.
3. The underground supply line shall be hydrostatically tested and flushed prior to being hooked to the system, per NFPA 13. This is to be witnessed by the Fire Department. 48 hours of advance notice is required. The contractor shall provide the Fire Department with a copy of the Contractors Material & Test Certificate for Underground Piping upon completion of tests.
4. Sprinkler system supply lines must have a double check detector valve for backflow prevention for all sprinklers. A reduced pressure backflow must be used for antifreeze systems.
5. The aboveground piping shall be hydrostatically tested per NFPA 13, prior to any sheet rock or ceiling tile being installed. This is to be witnessed by the Fire Department. 48 hours of advance notice is required. The contractor shall provide the Fire Department with a copy of the Contractor's Material & Test Certificate for Aboveground Piping upon completion of the project.
6. At least 48 hours notification shall be given to the Fire Department prior to any test or inspection. Contact the Fire Department at 206-842-7686 for testing or inspection.
7. All valves are to be permanently identified by signs approved by the Fire Department.
8. The backflow device shall be tested prior to final inspection and approval. The test results must be forwarded to the Water Purveyor.
9. A general audible alarm shall sound throughout occupied areas of the building when water flow is detected. This may be accomplished through the building fire alarm system.
10. If properly installed insulation must be provided in the attic area to protect the sprinkler piping from freezing temperatures, the Contractor is responsible for ensuring this is done adequately.
1. A final inspection will be required prior to an Occupancy Certificate being issued.