



PROPOSED DESIGN

LEGEND

TREE - CONIFER

TREE - DECIDUOUS

PLANTED AREA - LOW MAINTENANCE MEADOW MIX
100% OF AREA: PERENNIAL GRASSES, 36" O.C.

PLANTING SOIL DEPTH 6" - 85% SANDY LOAM, 15% COMPOST
SUBGRADE PREP: 3" COMPOST TILLED INTO SUBGRADE

PLANTED AREA - HABITAT RESTORATION PLANTING
45% OF AREA: HERBACEOUS PERENNIALS, MIN 24" O.C.

75% OF AREA: NATIVE, DROUGHT TOLERANT SHRUBS, 48" O.C.
SUBGRADE PREP: 3" COMPOST SPADED INTO SURFACE SOIL

PLANTED AREA - NATIVE NORTHWEST FOREST UNDERSTORY
25% OF AREA: HERBACEOUS PERENNIALS, MIN 36" O.C.

100% OF AREA: NATIVE, DROUGHT TOLERANT SHRUBS, 36" O.C.
SUBGRADE PREP: 3" COMPOST TILLED INTO SUBGRADE

PLANTING SOIL DEPTH 18" - 70% SANDY LOAM, 30% COMPOST
IRRIGATION: DRIP

PLANTED AREA - BIORETENTION
100% OF AREA: HERBACEOUS PERENNIALS, 24" O.C.

SUBGRADE PREP: 3" COMPOST TILLED INTO SUBGRADE
PLANTING SOIL DEPTH 24" (BOTTOM) 12" (SIDE), 50% SAND
LOAM, 50% COMPOST

PLANTED AREA - NATIVE "ECO LAWN" OR SIMILAR,
HYDROSEEDDED
SUBGRADE PREP: 3" COMPOST TILLED INTO SUBGRADE

PLANTING SOIL DEPTH : 4"

PLANTED AREA - NATIVE "ECO LAWN" OR SIMILAR,
HYDROSEEDDED
SUBGRADE PREP: GRASSPAVE SYSTEM

PLANTED AREA - LAWN
SUBGRADE PREP: SCARIFY TO 3" D
COMPOST TILLED INTO SUBGRADE

PLANTED AREA - RAISED VEGETABLE GARDEN BED

EXISTING VEGETATION ENHANCEMENTS

1. THIN, LIMB, PRUNE, OR REPLACE TREES PER ARBORIST RECOMMENDATIONS
2. REMOVE INVASIVE PLANTS
3. REVEGETATE, SEE HABITAT RESTORATION PLANTING

MULCH

LIMIT OF WORK

CRITICAL ROOT ZONE


VEGETATION & SOIL PROTECTION ZONE

NOTES:

1. ALL EXISTING FOREST PERIMETER REPAIRS SHALL FOLLOW HABITAT RESTORATION PLANTING PLAN UNLESS OTHERWISE NOTED
2. ALL LIMIT OF WORK PERIMETER REPAIRS SHALL FOLLOW ADJACENT PLANTING REGIME
3. VEGETATION & SOIL PROTECTION ZONES ARE LOCATED OUTSIDE THE LIMIT OF WORK. ALL SOILS AND PLANTS IN THESE AREAS SHALL NOT BE DISTURBED DURING CONSTRUCTION
4. SEE F-1.1 FOR LAWN WITH DRAINAGE SYSTEM

NOT FOR CONSTRUCTION

10/10/2017 1:19:26 PM

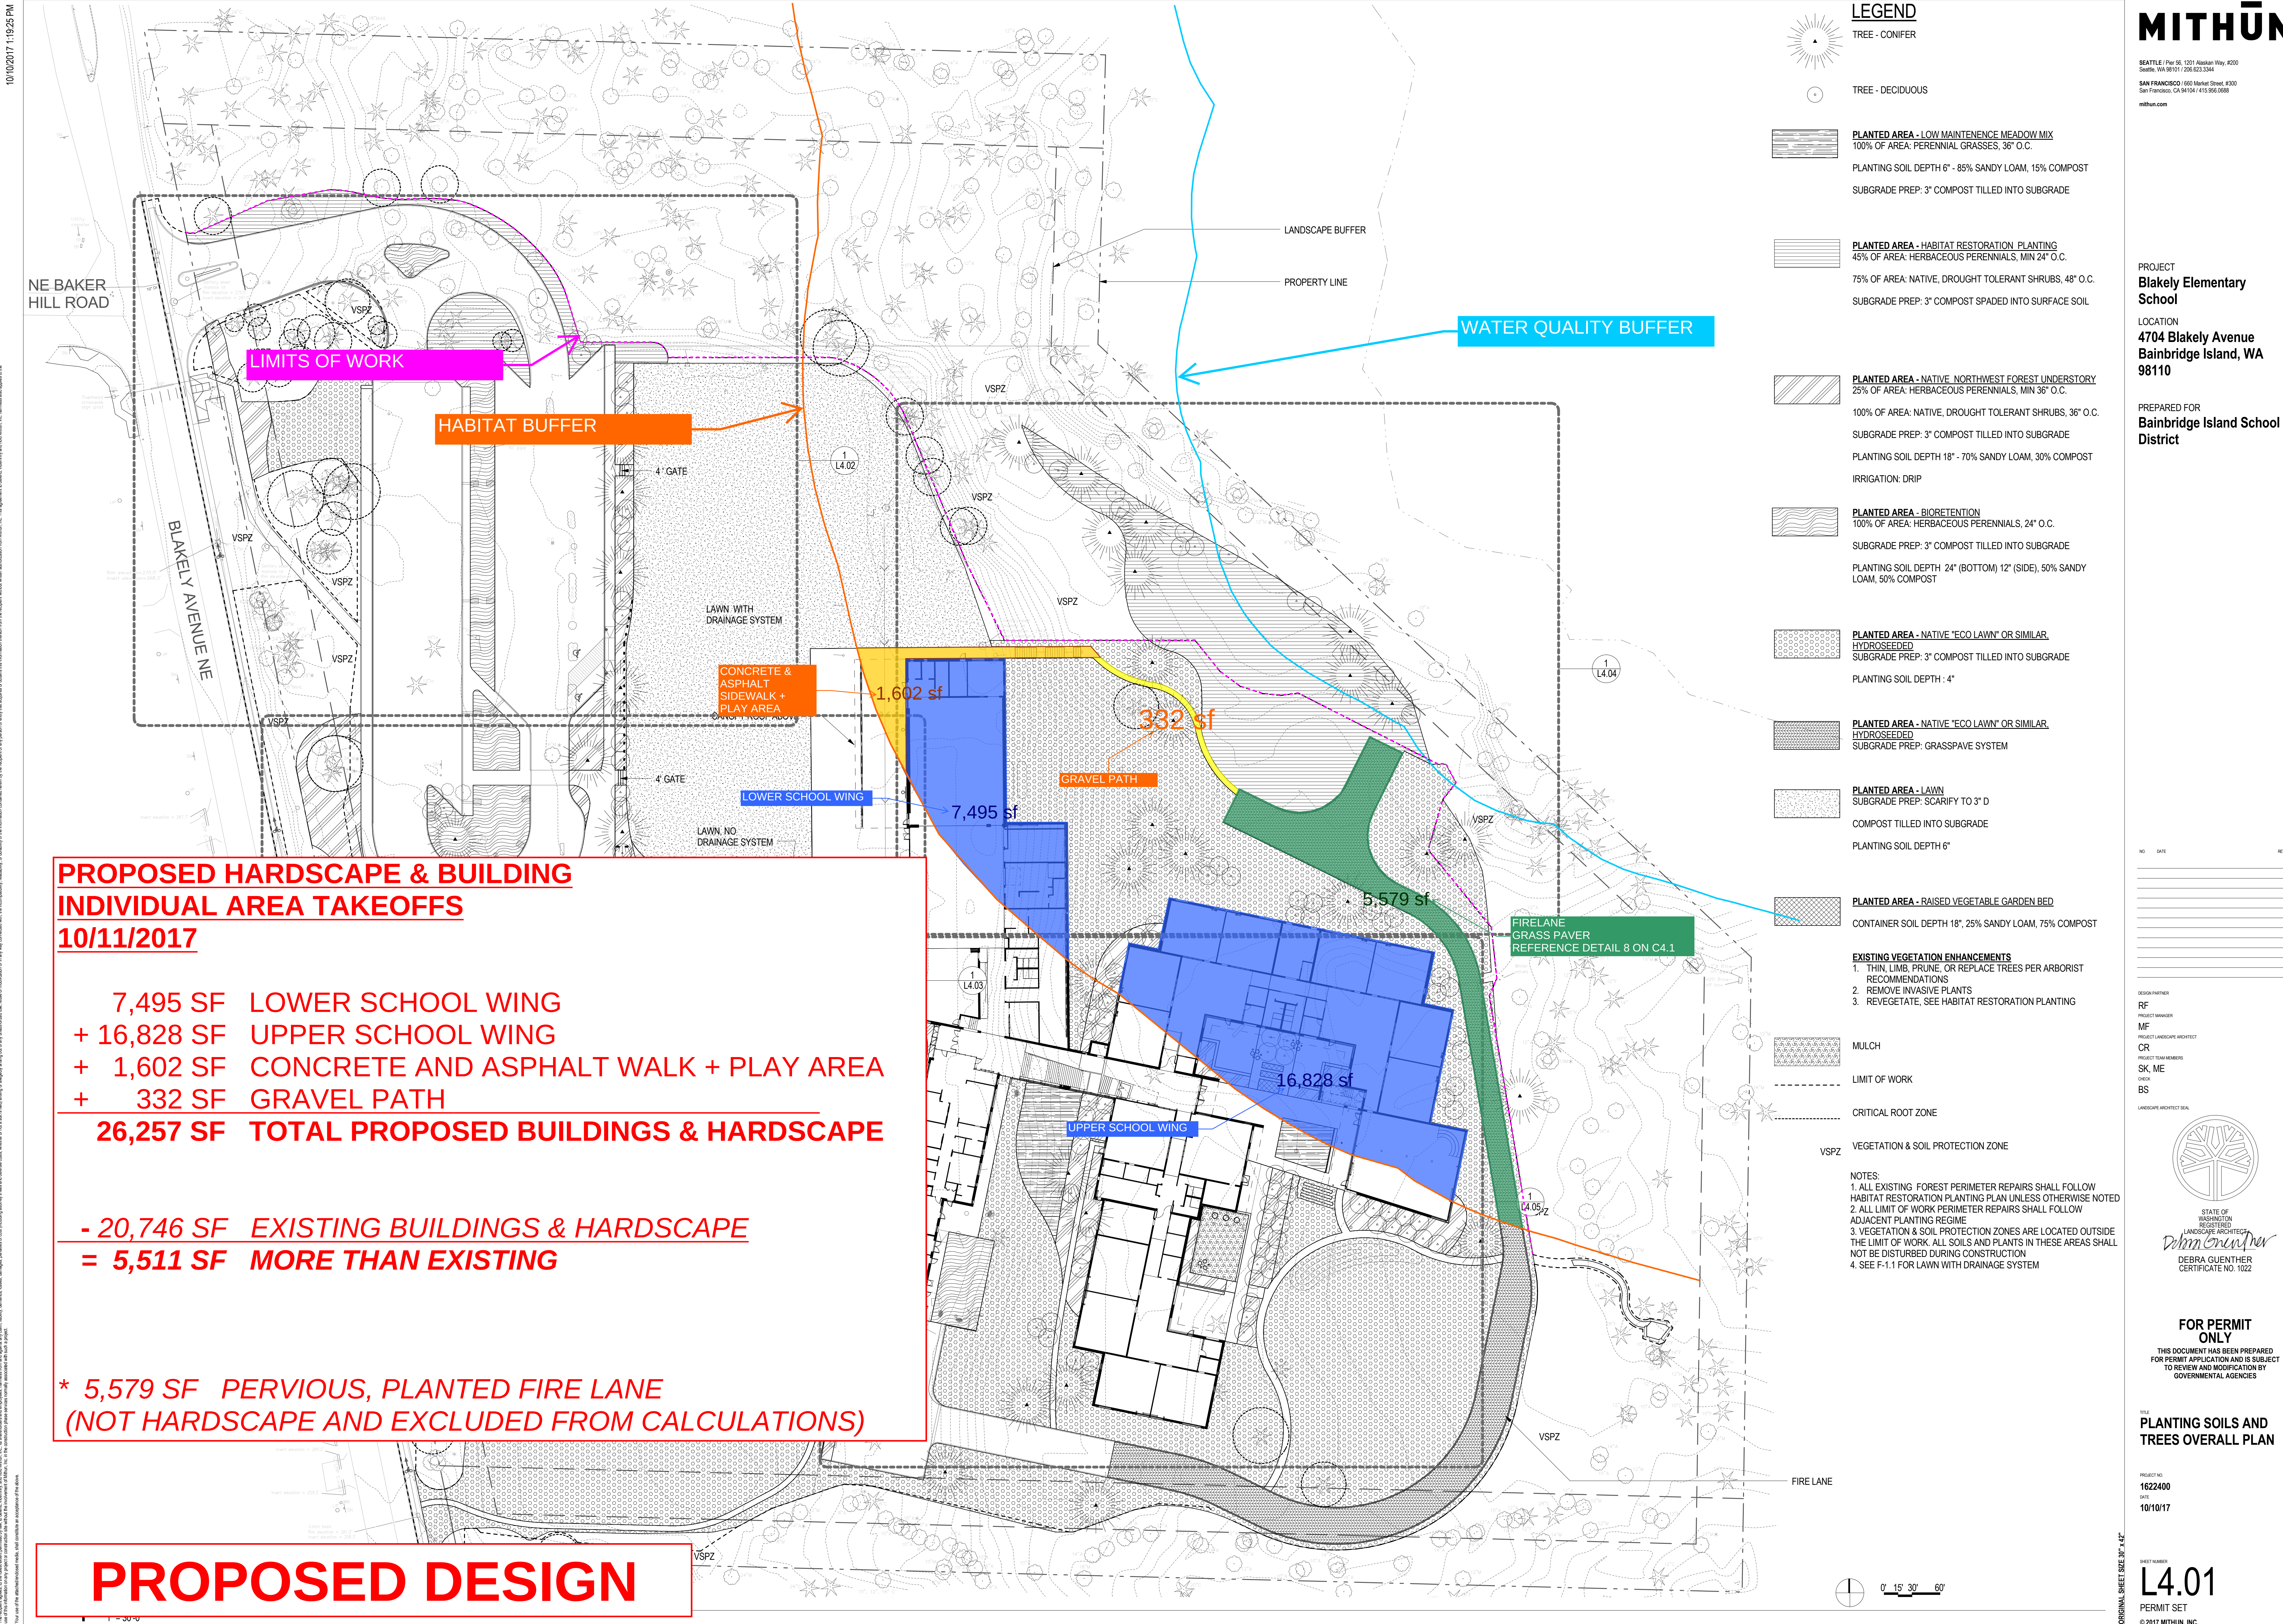

10/10/2017 1:19:25 PM

